

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 047 258 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
25.10.2000 Bulletin 2000/43

(51) Int. Cl.⁷: H04M 19/04

(21) Application number: 00303045.9

(22) Date of filing: 11.04.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Ritter, Kai-Uwe
91154 Roth (DE)


(74) Representative:
Buckley, Christopher Simon Thirsk et al
Lucent Technologies (UK) Ltd,
5 Mornington Road
Woodford Green, Essex IG8 0TU (GB)

(30) Priority: 19.04.1999 US 294166

(71) Applicant:
LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)

(54) Volume control for an alert generator

(57) In an apparatus for controlling the volume of a device's user alert sound based on an analysis of the device's environment, the device (20) emits a signal and receives a resulting reflected signal. A processor (25) measures characteristics such as the amplitude and/or delay of the reflected signal to determine the type of environment in which the communication device (20) is located. The volume of the alert sound is then adjusted based on the type of environment indicated by the characteristics of the reflected signal. For example, if the characteristics indicate a closed environment such as a brief case, the volume is adjusted to a high level, and if the characteristics indicate an open environment such as a desk top, the volume is adjusted to a low level.

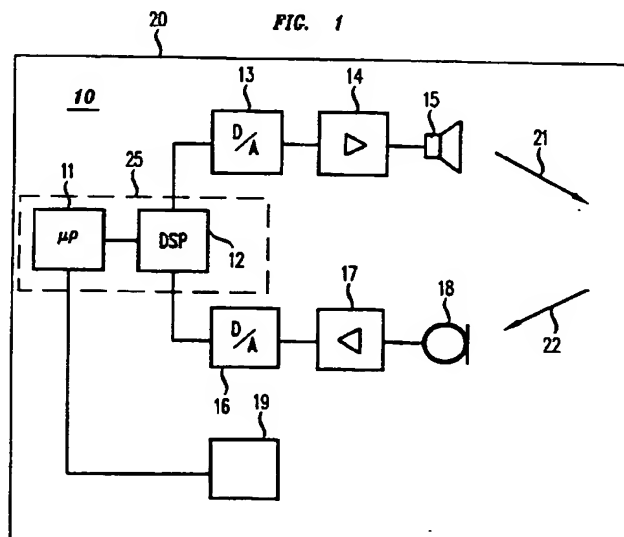

EP 1 047 258 A2

Description

Technical Field

[0001] The present invention relates generally to the field of telephones and more particularly to telephones controlling the volume of an alert.

Background of the Invention

[0002] Telephones have a ringing tone or other user alert sound that indicates when there is an incoming call. In some telephones the volume of the ringing tone is adjustable so that it can be audible in different environments having different noise levels.

[0003] One type of telephone that has an adjustable volume of the ringing tone is shown in European patent application EP 0 507 482 A2. European patent application EP 0 507 482 A2 discloses a telephone in which a circuit detects the level of an ambient noise signal and produces a detection signal responsive to the ambient noise signal. The detection signal is then used to produce a control signal that controls the ringing tone volume.

[0004] The above-described technique for controlling ringing tone volume suffers from a disadvantage. If the telephone is kept in a depository like a briefcase or in the pocket of a coat or jacket, the ringing tone will not be audible. This problem occurs because the ringing tone volume will be adjusted to a low level based on the low ambient noise in the depository.

Summary of the Invention

[0005] The present invention solves the above described problem by controlling the volume of a device's user alert sound based on an analysis of the device's environment. In one embodiment, the device emits a sound and receives a resulting reflected sound. A processor measures characteristics such as the amplitude and/or delay of the reflected sound to determine the type of environment in which the device is located. The volume of the user alert sound is then adjusted based on the type of environment indicated by the characteristics of the reflected sound. For example, if the characteristics indicate a closed environment such as a brief case, the volume is adjusted to a high level, and if the characteristics indicate an open environment such as a desk top, the volume is adjusted to a low level.

Brief Description of the Drawings

[0006]

FIG. 1 is a block diagram of an embodiment of the present invention.

Detailed Description

[0007] FIG. 1 is a block diagram of telephone 10, such as cellular or a wireless telephone. Although the present embodiment of the invention is being illustrated with the use of a telephone, this should not be construed to limit the present invention to telephones. The present invention may equally be applicable to any device that has an alert, such as a palm computer, or a watch.

[0008] Telephone 10 has a processor 25. Processor 25 can be any processor, such as a microcomputer, microprocessor 11, digital signal processor 12, or any combination of the foregoing. Although, processor 25 is shown in FIG. 1 as having both microprocessor 11 and digital signal processor 12, processor 25 may include only one of the two devices, and the functionality that is ascribed to microprocessor 11 and digital signal processor 12 is performed by the one device. Telephone 25 also has digital to analog converter 13, speaker amplifier 14, speaker 15, microphone 18, microphone amplifier 17, analog to digital converter 16 and ringer 19. Telephone 10 may also include other elements (not shown) such as an antenna and a transceiver.

[0009] When telephone 10 receives a call, microprocessor 11 instructs digital signal processor 12 to analyze telephone 10's environment to determine, for example, if the telephone is in a depository 20 such as a briefcase or a pocket of a coat. Microprocessor 11 then generates a control signal to activate ringer 19 to alert a user that there is an incoming call. Microprocessor 11 instructs digital signal processor 12 to analyze telephone 10's environment in order to ensure that the sound generated by ringer 19 is audible to the user. Digital signal processor 12 performs this analysis when a new incoming call is detected, but before activating ringer 19.

[0010] To analyze the location of telephone 10, digital signal processor 12 generates digital measuring signals. The digital measuring signals are converted to analog signals by digital to analog converter 13, amplified by speaker amplifier 14 and converted to an acoustic signal 21 by speaker 15. To avoid disturbance to the user, the measuring signals may be chosen in such a way that the generated acoustic signal 21 is in a frequency range that is not audible to the user. Acoustic response signal 22 is received by microphone 18. Microphone 18 converts acoustic response signal 22 to an analog signal that is provided to microphone amplifier 17. The amplified signal is converted to a digital signal by analog to digital converter 16 and fed to digital signal processor 12. Digital signal processor 12 analyzes the digital samples of the response signal to determine the location of telephone 10.

[0011] When telephone 10 is kept in a depository such as a briefcase or pocket, the response signal is received by digital signal processor 12 having a short delay referenced to the time at which the measuring sig-

nal was generated. The delay is in proportion with an impulse response of the space surrounding telephone 10. Long delay times, such as any delay time above about .92 milli-seconds (ms), characterize a wider space and short delay times, such as any delay time below about .92 ms, characterize a closed space such as a briefcase or a pocket

[0012] In addition, the attenuation of the response signal may be analyzed by digital signal processor 12, to further characterize the telephone's environment. Response signals having characteristics such as a short delay and strong attenuation, such as above about 50%, indicate that the telephone is in a depository that is highly sound absorbent, such as a pocket of a coat or a jacket. Response signals having a short delay and weak attenuation, such as below about 50%, indicate a depository such as a briefcase that is absorbs sound to a lesser degree. Response signals having a long delay indicate an open space.

[0013] The result of the analysis of digital signal processor 12 is used by microprocessor 11 to adjust the volume of the ringing tone produced by ringer 19. For short delays and strong attenuation the volume is set at a high level, for short delays and weak attenuation the volume is set at a medium level, and for long delays the volume is set at a lower level.

[0014] Microprocessor 11 can also adjust the volume of ringer 19 using volumes that are correlated to delay times. For example, a table containing ringing tone volume values corresponding to delay times can be stored in a memory that is accessible to microprocessor 11. Digital signal processor 12 passes the delay time to microprocessor 11, which uses the delay time to look up the corresponding ringing tone value from the table.

[0015] The analyzing and adjusting process as described above can be repeated after each ringing tone or after a given number of ringing tones to produce a comfortable ringing tone volume. This avoids overly loud ringing when a high volume value is initially selected by microprocessor 11, for example, when the telephone was originally in a depository and is then taken out of the depository.

[0016] If telephone 20 has a vibrator, the vibrator may be activated by microprocessor 11 at the time of an incoming call when the characteristics of response signal 22 indicate that the telephone is in a pocket. For example, when the time delay is below a time delay threshold of about .46ms and the attenuation exceeds an attenuation threshold of about 50% the vibrator would be activated. Additionally, a temperature sensor can be coupled to microprocessor 11. If the temperature sensor measures a temperature close to the temperature of the human body, the vibrator may be activated.

[0017] It should be noted that instead of a ringer 19, speaker 15 may be used to produce the ringing tone. Additionally, although the alert has been illustrated as a ringing tone, the alert can be any audio signal, such as

a prerecorded voice.

[0018] While the invention has been described with reference to a preferred embodiment, it will be understood by those skilled in the art having reference to the specification and drawings that various modifications may be made and various alternatives are possible therein without departing from the spirit and scope of the invention.

Claims

1. A device (20) CHARACTERIZED BY:

an alert generator (19) that generates an alert having a volume; and
a processor (25) coupled to the alert generator (19), wherein the processor (25) performs an analysis of a space surrounding of the device (20) and controls the volume of the alert responsive to the analysis.

2. The device (20) according to claim 1, CHARACTERIZED IN THAT the processor (25):

produces a measuring signal;
receives a response signal resulting from the measuring signal interacting with the space;
analyzes a delay time between the measuring signal and the response signal; and
controls the volume of the alert responsive to the delay time.

3. The device according to claim 2, CHARACTERIZED IN THAT the processor (25) comprises a memory for storing a table of alert volume values corresponding to delay times.

4. The device according to claim 2, CHARACTERIZED IN THAT the processor (25):

analyzes an attenuation of the response signal relative to the measuring signal; and
controls the volume of the alert responsive to the attenuation.

5. The device according to claim 4, further CHARACTERIZED BY a vibrator, wherein the vibrator is activated responsive to the time delay of the response signal being below a time delay threshold and the attenuation of the response signal exceeding an attenuation threshold.

6. The device according to claim 1, CHARACTERIZED IN THAT the processor (25) performs the analysis and controls the volume at the beginning of each incoming call before the alert generator (19) generates the alert.

7. The device according to claim 1, CHARACTERIZED IN THAT the processor (25) performs the analysis and controls the volume before the alert generator (19) generates each alert.

8. The device according to claim 1, CHARACTERIZED IN THAT:

the alert generator (19) generates one or more groups of alerts each having a plurality of alerts; and
the processor (25) performs the analysis and controls the volume before the alert generator generates each group of alert.

9. The device according to claim 1, CHARACTERIZED IN THAT the alert generator (25) is a ringer.

10. The device according to claim 1, CHARACTERIZED IN THAT the processor (25) is a microprocessor (11).

11. The device according to claim 1, CHARACTERIZED IN THAT the processor (25) is a digital signal processor (12).

12. A method for generating and controlling an alert on a device (20), the method CHARACTERIZED BY the steps of:

analyzing a space surrounding the device (20);
adjusting the volume of the alert responsive to the analysis the space; and
generating the alert.

13. The method according to claim 12, CHARACTERIZED IN THAT the step of analyzing the space comprises the steps of:

generating a measuring signal;
receiving a response signal resulting from the measuring signal interacting with the space;
and
analyzing the response signal.

14. The method according to claim 13, CHARACTERIZED IN THAT the step of analyzing the space comprises analyzing a delay time between the measuring signal and the response signal.

15. The method according to claim 14, CHARACTERIZED IN THAT the step of adjusting the volume of the alert responsive to the analysis the space comprises the steps of:

increasing the volume of the alert responsive to a short delay time; and
decreasing the volume of the alert responsive

to a long delay time.

16. The method according to claim 14, CHARACTERIZED IN THAT:

the step of analyzing the space comprises analyzing an attenuation of the response signal relative to the measuring signal and
the step of adjusting the volume of the alert responsive to the analysis the space comprises the steps of:

setting the volume of the alert to a high level responsive to a short delay time and strong attenuation;
setting the volume of the alert to a medium level responsive to a short delay time and weak attenuation; and
setting the volume of the alert to a low level responsive to a long delay time.

17. The method according to claim 16, CHARACTERIZED IN THAT

the device (20) further comprises a vibrator; and
the method further comprises the step of activating the vibrator responsive to the time delay of the response signal being below a time delay threshold and the attenuation of the response signal exceeding an attenuation threshold.

18. The method according to claim 14, CHARACTERIZED IN THAT the step of adjusting the volume of the alert responsive to the analysis the space comprises the steps of:

obtaining the alert volume from a table of alert volume values corresponding to delay times; and
adjusting the volume of the alert to the alert volume value obtained from the table.

19. The method according to claim 13, CHARACTERIZED IN THAT the step of analyzing the space comprises analyzing an attenuation of the response signal relative to the measuring signal.

20. The method according to claim 12, CHARACTERIZED IN THAT the step of analyzing the space is performed for each incoming call prior to generating the alert.

21. The method according to claim 12, CHARACTERIZED IN THAT the step of analyzing the space is performed prior to generating each alert.

22. The method according to claim 12, CHARACTER-

IZED IN THAT:

the step of generating the alert includes gener-
ating one or more groups of alerts each having
a plurality of alerts; and
the step of analyzing the space is performed
prior to generating each group of alert.

5

10

15

20

25

30

35


40


45

50

55

FIG. 1

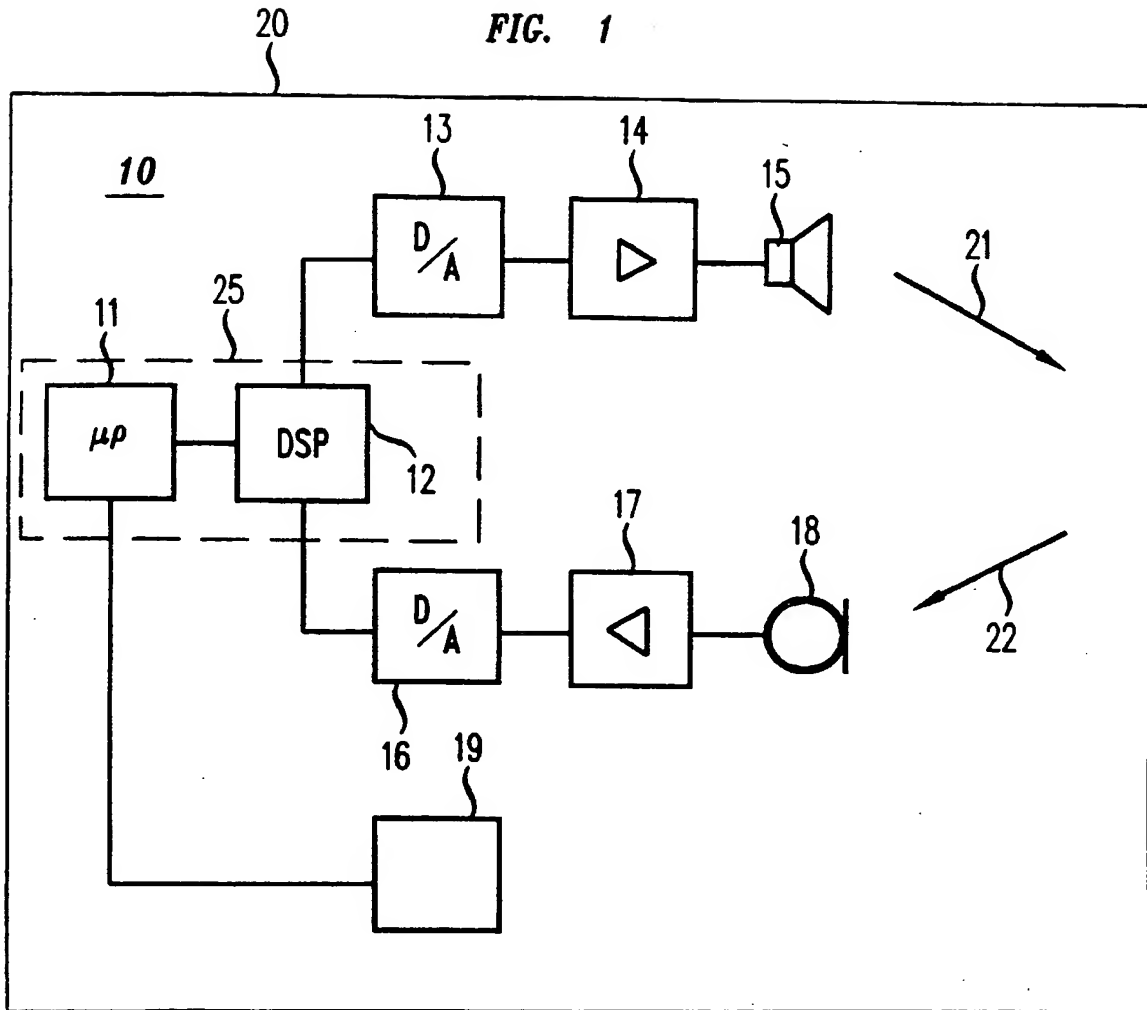



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 047 258 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
10.09.2003 Bulletin 2003/37

(51) Int Cl.7: **H04M 19/04**

(43) Date of publication A2:
25.10.2000 Bulletin 2000/43

(21) Application number: **00303045.9**

(22) Date of filing: **11.04.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Ritter, Kai-Uwe**
91154 Roth (DE)

(74) Representative:
Buckley, Christopher Simon Thirsk et al
Lucent Technologies (UK) Ltd,
5 Mornington Road
Woodford Green, Essex IG8 0TU (GB)


(30) Priority: **19.04.1999 US 294166**

(71) Applicant: **LUCENT TECHNOLOGIES INC.**
Murray Hill, New Jersey 07974-0636 (US)

(54) **Volume control for an alert generator**

(57) In an apparatus for controlling the volume of a device's user alert sound based on an analysis of the device's environment, the device (20) emits a signal and receives a resulting reflected signal. A processor (25) measures characteristics such as the amplitude and/or delay of the reflected signal to determine the type of environment in which the communication device (20) is lo-

cated. The volume of the alert sound is then adjusted based on the type of environment indicated by the characteristics of the reflected signal. For example, if the characteristics indicate a closed environment such as a brief case, the volume is adjusted to a high level, and if the characteristics indicate an open environment such as a desk top, the volume is adjusted to a low level.

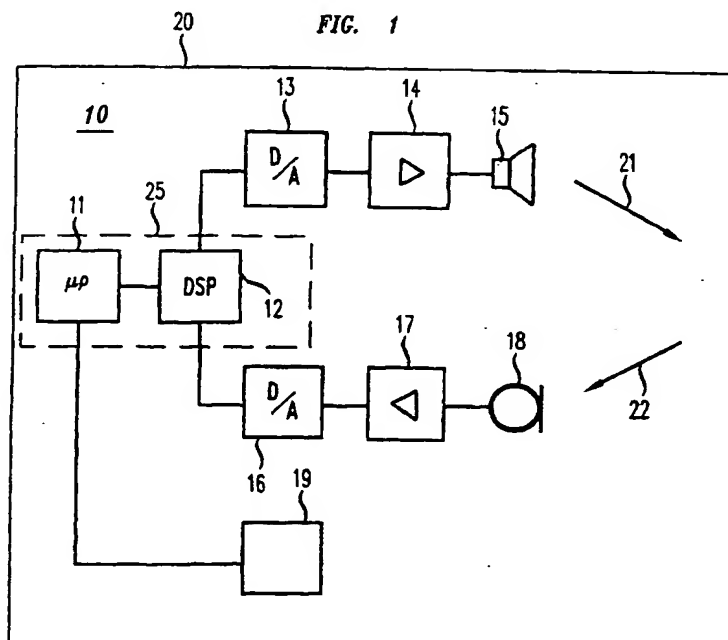



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 3045

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 99 05850 A (NORTHERN TELECOM LTD) 4 February 1999 (1999-02-04)	1-4, 6-16, 18-22	H04M19/04
Y	* page 1, line 18 - line 24 * * page 3, line 23 - page 5, line 2 * * page 7, line 1 - line 25 * * page 7, line 34 - page 8, line 8 * * page 8, line 32 - line 36 * * page 9, line 5 - line 19 * * page 9, line 33 - page 10, line 5 * * page 10, line 16 - line 21 * * page 12, line 20 - line 25 * * page 13, line 15 - line 34 * * page 14, line 8 - line 26; figures 1-6 * ---	5,17	
X	WO 97 16932 A (ELONEX TECHNOLOGIES INC) 9 May 1997 (1997-05-09)	1,9,10, 12,13	
Y	* page 1, line 20 - page 2, line 8 *	5,17	
A	* page 2, line 32 - page 3, line 3 * * page 4, line 13 - line 35 * * page 5, line 1 - line 13 * * page 5, line 20 - line 28 * * page 6, line 16 - line 28; figure 2 * ---	2-4,6-8, 11, 14-16, 18-22	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04M H04Q G01S
X	US 5 844 983 A (LILJA PATRIK HANS) 1 December 1998 (1998-12-01)	1,7, 9-13,19, 21	
A	* column 1, line 66 - column 2, line 11 * * column 2, line 57 - line 59 * * column 3, line 5 - line 31 * --- -/--	2-6,8, 14-18, 20,22	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 22 July 2003	Examiner Sorrentino, A
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 3045

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	GB 2 313 978 A (NIPPON ELECTRIC CO) 10 December 1997 (1997-12-10) * page 2, line 28 - line 12 * * page 7, line 18 - page 8, line 26 * ---	1,6,7, 10,12, 13,20,21	
A	US 4 076 968 A (WATTENBARGER BLAKE LANE) 28 February 1978 (1978-02-28) * column 1, line 42 - line 48 * * column 1, line 63 - line 66 * * column 2, line 49 - line 68 * -----	1-22	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search THE HAGUE		Date of completion of the search 22 July 2003	Examiner Sorrentino, A
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 [P04C01]

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 3045

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-07-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9905850	A	04-02-1999	US 6246761 B1	12-06-2001
			WO 9905850 A1	04-02-1999
WO 9716932	A	09-05-1997	WO 9716932 A1	09-05-1997
US 5844983	A	01-12-1998	AU 740803 B2	15-11-2001
			AU 7832898 A	08-02-1999
			BR 9810863 A	19-09-2000
			CN 1270735 T	18-10-2000
			EE 200000007 A	15-08-2000
			EP 0995303 A2	26-04-2000
			JP 2001510306 T	31-07-2001
			TR 200000030 T2	22-05-2000
			WO 9903259 A2	21-01-1999
GB 2313978	A	10-12-1997	AU 718543 B2	13-04-2000
			AU 2472297 A	11-12-1997
			JP 2940516 B2	25-08-1999
			JP 10056494 A	24-02-1998
			US 6044279 A	28-03-2000
US 4076968	A	28-02-1978	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82